


# PIN+ Release3.3 TypeC with FIDO2.1, U2F, TOTP, HOTP, PIV and OpenPGP

Part no: T2F2PINPlusRel3.3PIVTypeC · T2-102

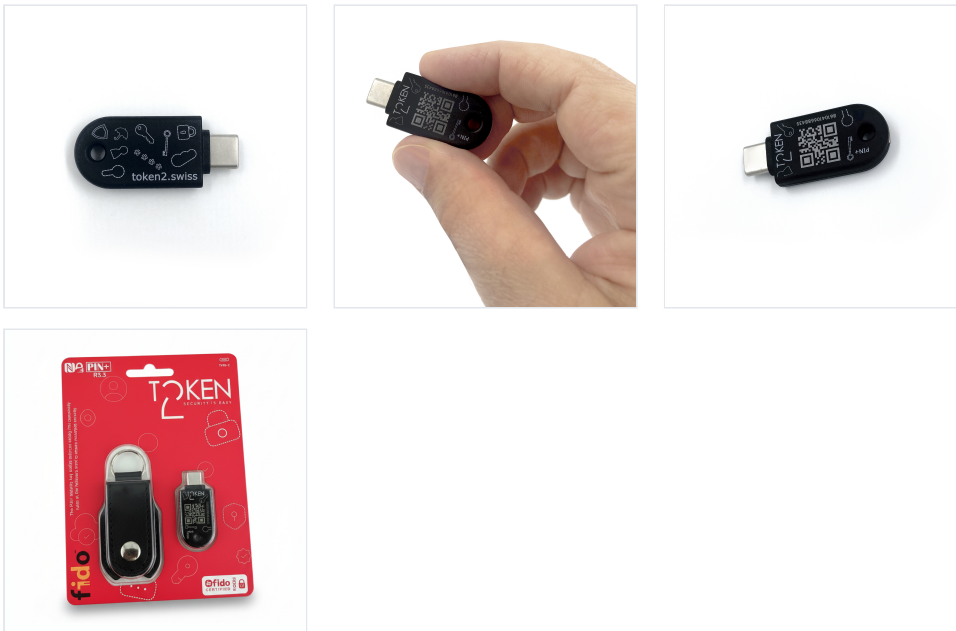

## Description

The PIN+ Release3.3 TypeC is an NFC-enabled FIDO2 Security key with a USB Type-C port, featuring advanced PIN complexity at the firmware level. With an NFC chip onboard, this FIDO2 key can be used natively on modern iPhones (starting from iOS 13.3) and on Android devices with NFC support. This model includes a capacitive sensor-type integrated touch-button and is only 6 mm thick.

### Firmware 3.3 Release

Version 3.3 adds [PIV functionality](#) to existing features.

## FIDO Security Keys

FIDO security keys are small USB dongles that enable secure login to websites and applications supporting FIDO2 WebAuthn and classic FIDO (U2F) standards. With our PIN+ Series, you can now store up to 300 passkeys (also known as resident keys or discoverable credentials) on a single device.

The PIN+ Release3.3 TypeC combines hardware-based authentication, public-key cryptography, TOTP/HOTP, U2F, and FIDO2 protocols to protect your accounts. This device provides the highest level of multifactor authentication for user accounts with platforms such as Twitter, Facebook, Gmail, GitHub, Dropbox, Dashlane, Salesforce, Duo, Centrify, and hundreds more HOTP, U2F, and FIDO2 compatible services. No additional tools or applications are required; simply insert the Security Key into a USB-TypeC slot and authenticate with a simple touch. The security key does not require a battery nor network connectivity – it is always on and accessible.

## Specifications

|                               |                                                                                                                                                        |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model Number                  | Token2 PIN+ Release3.3 TypeC                                                                                                                           |
| Button                        | Capacitive interface button                                                                                                                            |
| Functions                     | FIDO U2F + FIDO2.1 WebAuthn + HOTP (HID) + TOTP (with a <a href="#">companion app</a> )                                                                |
| OpenPGP                       | RSA2048, RSA3072, RSA4096<br>secp256r1, secp256k1, secp384r1, secp521r1<br>ed25519, x25519<br>User Interaction Flags (UIF), Key Derived Function (KDF) |
| Embedded Security Algorithm   | ECDSA, SHA256, AES, HMAC, ECDH                                                                                                                         |
| SSH with FIDO Support         | ecdsa-sk & ed25519-sk                                                                                                                                  |
| Interface Type                | NFC, USB Type-C                                                                                                                                        |
| Included Accessories          | <b>Leather protective case</b>                                                                                                                         |
| Firmware                      | FIDO 2.1 <sup>Token2</sup><br><a href="#">PIN complexity enforcement</a>                                                                               |
| Maximum FIDO2.1 Resident Keys | <b>300</b>                                                                                                                                             |
| Maximum OTP Profiles          | 50 TOTP/HOTP via the app + 1 HOTP via HID                                                                                                              |
| Lifetime                      | At least 10 years                                                                                                                                      |
| Programming Cycles            | 100,000 times                                                                                                                                          |
| Communication Protocol        | CTAP2.1, HID, NFC                                                                                                                                      |
| Working Voltage               | 5.0V DC                                                                                                                                                |
| Input Current                 | 35mA                                                                                                                                                   |
| Power                         | 0.18W                                                                                                                                                  |
| Working Temperature           | -10°C - 50°C                                                                                                                                           |
| Dimensions                    | 42.1 mm x 17 mm x 6 mm                                                                                                                                 |
| Storage Temperature           | -20°C - 70°C                                                                                                                                           |

**Enhanced Water Resistance**

This model features a specialized PCB (Printed Circuit Board) coating for enhanced water resistance, ensuring durability against water ingress and safeguarding your data in any environment.

**TOTP Feature**

The PIN+/TypeC Security key can securely store the secrets for your TOTP profiles but requires a [companion app](#) (available for Android, iPhone, Windows, and cross-platform via a Python tool for Linux, macOS, and similar systems) to generate OTPs.

**iOS Support**

[Native support of NFC FIDO2 Keys in iPhone Safari](#)

**Integration Guides**

- [Using Your Token2 Security Key with Google](#)
- [Passwordless authentication in Azure AD with Token2 FIDO2 keys](#)
- [FIDO U2F security key for Stripe](#)
- [Using FIDO2 USB keys under Linux](#)

**Specifications**

| GENERAL            |              |
|--------------------|--------------|
| Form factor        | Plastic case |
| Interface          | USB-C, NFC   |
| CONNECTIVITY       |              |
| USB-C              | Yes          |
| NFC                | Yes          |
| OTP                |              |
| OTP protocols      | TOTP, HOTP   |
| TOTP               | Yes          |
| HOTP               | Yes          |
| FIDO               |              |
| U2F                | Yes          |
| FIDO certification | L2           |

|                    |                               |
|--------------------|-------------------------------|
| Minimum PIN policy | 6 digits, complexity enforced |
| OpenPGP support    | Yes                           |
| PIV support        | Yes                           |
| <b>DIMENSIONS</b>  |                               |
| Dimensions         | 42×17×6                       |